


# GLASDAN® R-36

## PRODUCT DATA SHEET

### DESCRIPTION & USES

Glasdan R-36 is an SBS modified bitumen base membrane with a fiberglass mat reinforcement, protected with a burn-off film and or silica sand on either side.

Glasdan R-36 is to be used in conjunction to Danosa Roofing Systems. This membrane can also be used as a temporary fix or sacrificial membrane. The installation procedure is by means of a high heat propane torch, hot-mop or cold adhesive according to specifications and roof requirements. It may be used in Built-up Roofing Systems and over most roof decks with positive drainage. Contact Danosa for specific approval on other product uses.

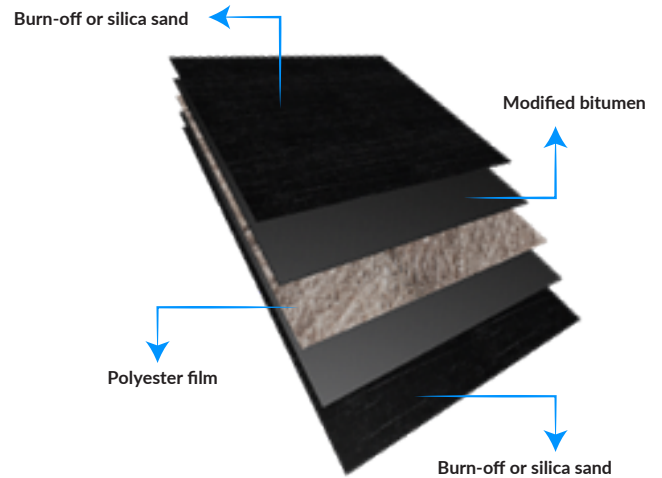

### STORAGE & HANDLING

All Danosa roll roofing products should be stored on end on a clean flat surface. Care should be taken that rolls are not dropped on ends or edges and are not stored in a leaning position. Deformation resulting from these actions will make proper installation difficult. All roofing material should be stored in a dry place, out of direct exposure to the elements.

### ADVANTAGES

Glasdan R-36 has excellent tensile strength and puncture resistance. It is easy to handle due to the flexibility and dimensional stability and quick installations can be obtained with excellent results.

### PACKAGING

The rolls are placed upright on the selva edge on pallets. The palletized material is protected by a polyethylene film and stretched wrapped at the base of

**Pallet:** 40 in x 48 in wooden pallet.  
**Number Rolls Per Pallet:** 25

### PRODUCT APPROVALS

Glasdan R-36 meets the specification ASTM D-6163, Grade S, Type I, and with the requirements of CGSB-37-GP-56M. Glasdan R-36 is approved by Factory Mutual Research Corporation, Miami-Dade and Underwriters Laboratories for use in Danosa Approved Systems. Danosa Roofing Systems also have received approval of many regional and local authorities such as:

COMMERCIAL PRODUCT INFORMATION	
Effective Coverage	9.3 m <sup>2</sup> (100ft <sup>2</sup> )
Weight per roll	Avg: 80lbs.
Roll Length	10.21m (33.5ft)
Roll Width	Avg:1 meter (3.28ft)
Thickness	Avg: 3.0mm (118 mils)
Top Surfacing	Burn-off or silica sand
Back Surfacing	Burn-off or silica sand



**GLASDAN® R-36**  
PRODUCT DATA SHEET

**PHYSICAL AND MECHANICAL PROPERTIES**

Property (As Manufactured)	Test Method	Units	Values
Thickness	ASTM D 5147	mils/mm	118/3.0
Weight	ASTM D 146	Lbs/ft <sup>2</sup>	0.80
Maximum Load @ 73°F	ASTM D 5147	lbf/in	83
Maximum Load @ 0°F	ASTM D 5147	lbf/in	163
Elongation @ Maximum Load, 73°F	ASTM D 5147	%	4
Tensile-Tear Strength	ASTM D 5147	lbf	120
Compound Stability	ASTM D 5147	215°F 102°C	No failure
Dimensional Stability	ASTM D 5147	%	0.1



**LEED INFORMATION**

Post-Consumer Recycled Content: 0%  
 Post Industrial Recycled Content: 20%  
 Manufacturing Location: Bayamon, PR  
 Solar Reflectance Index: 100\*

\*- when coated with our Danosa White Roof Coating

